

# DALI

# PHANTOM AMP

## SPEAKER PRESETS

## USER GUIDE



IN ADMIRATION OF MUSIC

This user guide will instruct you on how to import presets and build preset speaker libraries on your DALI PHANTOM AMP.

### **The guide will cover three topics:**

- 1** How to import a speaker preset from your PC
- 2** How to build your own Speaker Library on the amplifier
- 3** How to import a speaker preset from the Speaker Library on the amplifier

# 1 How to import a single preset (on one output channel)

Go to [www.dali-speakers.com](http://www.dali-speakers.com)

Go to CUSTOM INSTALL -> PHANTOM AMP


Download the latest **DALI Preset Package** from the “Downloads” section of your chosen DALI PHANTOM AMP.

Un-Zip the downloaded file to a preferred location on your local computer.

Connect to the amplifier and open the DALI AMP CONFIGURATOR interface in your browser.

Instructions on how to connect to the AMP CONFIGURATOR interface can be found in the PHANTOM AMP User Manual. (Available under “Downloads” on the DALI PHANTOM AMP product page)


**A** Go to “Output” -> “Speaker Presets”

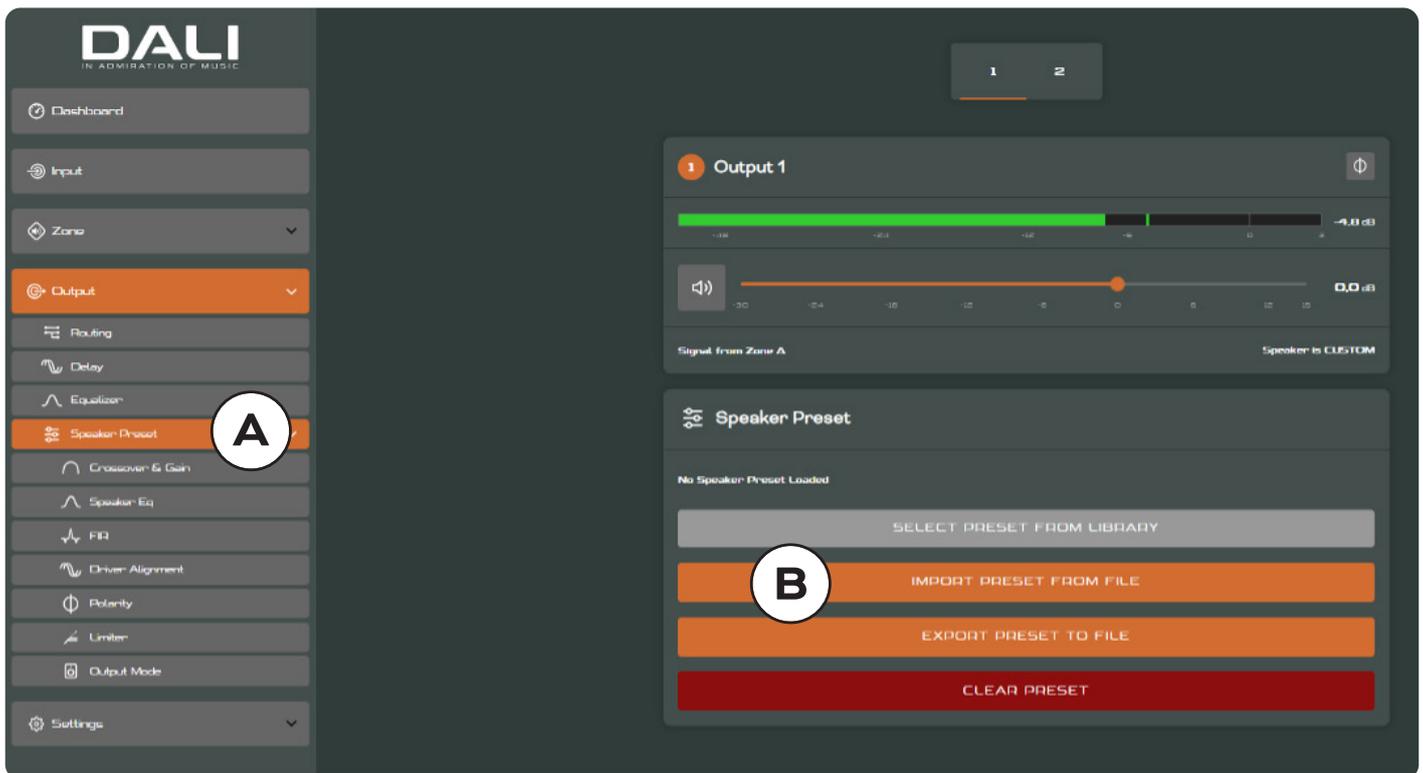

Choose which output you want to load a preset on, by pressing the desired output tab in the top of the page.


**B** Press “IMPORT PRESET FROM FILE”

Press “Select file speaker preset(\*.zcp)”

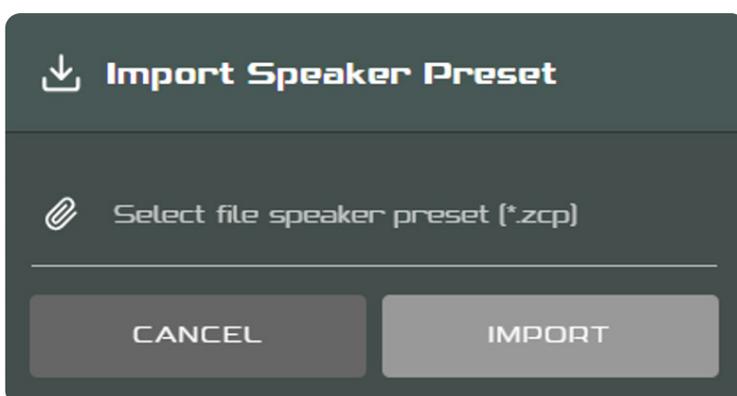


Go to the folder destination where you saved and unzipped the downloaded DALI Preset Package and choose the preset you want to load for the chosen output channel.

Press “Open” in the finder.

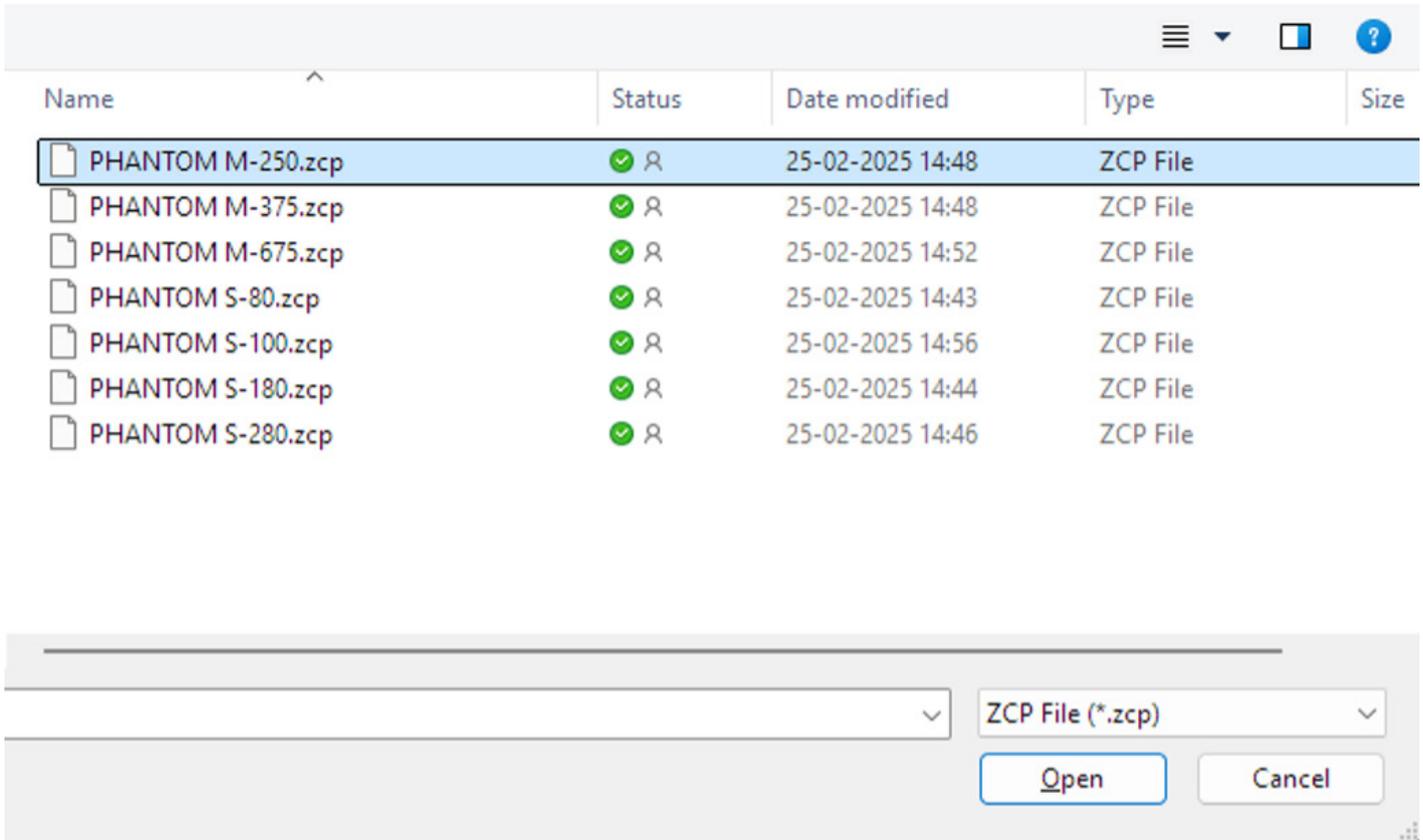


In this example, we have chosen the PHANTOM M-250 preset to be loaded on Output Channel 1.

Press “IMPORT”.

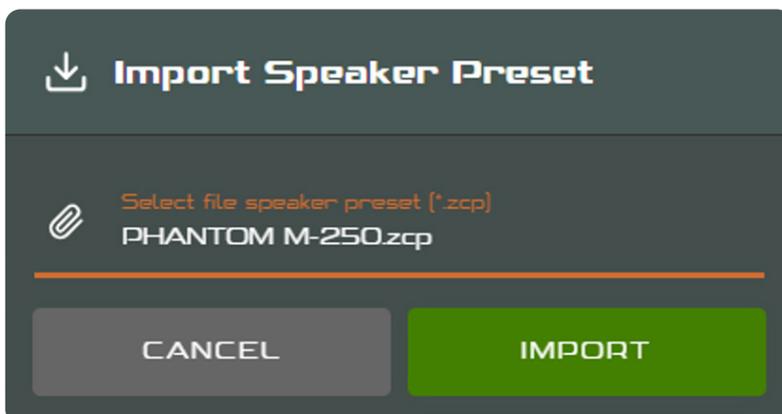

## Congratulations!

The PHANTOM M-250 speaker preset is now loaded on Output Channel 1.

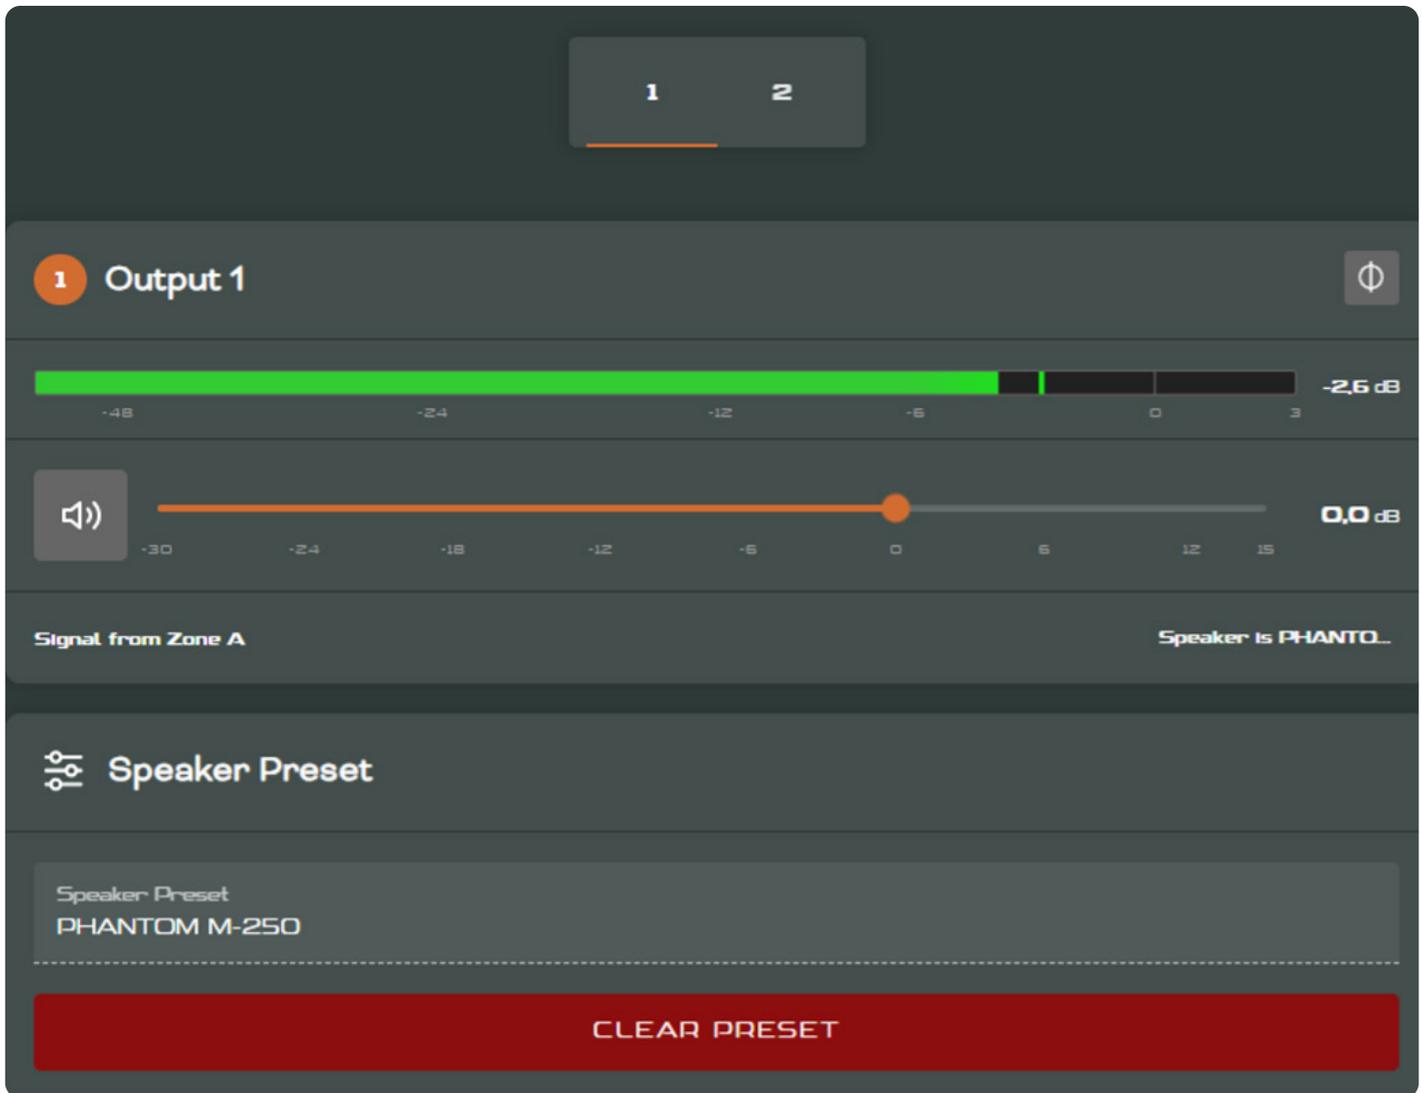

You can continue, using the same procedure, to load more presets to the other output channels, if needed.


## 2 How to build a Speaker Library (with presets)

Speaker presets (.zcp files), either supplied by DALI or self-made ones, can be imported and saved locally into the DALI PHANTOM AMP's Speaker Library.

The Speaker Library menu enables management of loudspeaker preset libraries.

Libraries of loudspeaker preset files (.zcl) can be created, and existing libraries can be imported, edited or fully deleted.

To open the Speaker Library menu, go to "Settings" -> "Speaker Library"

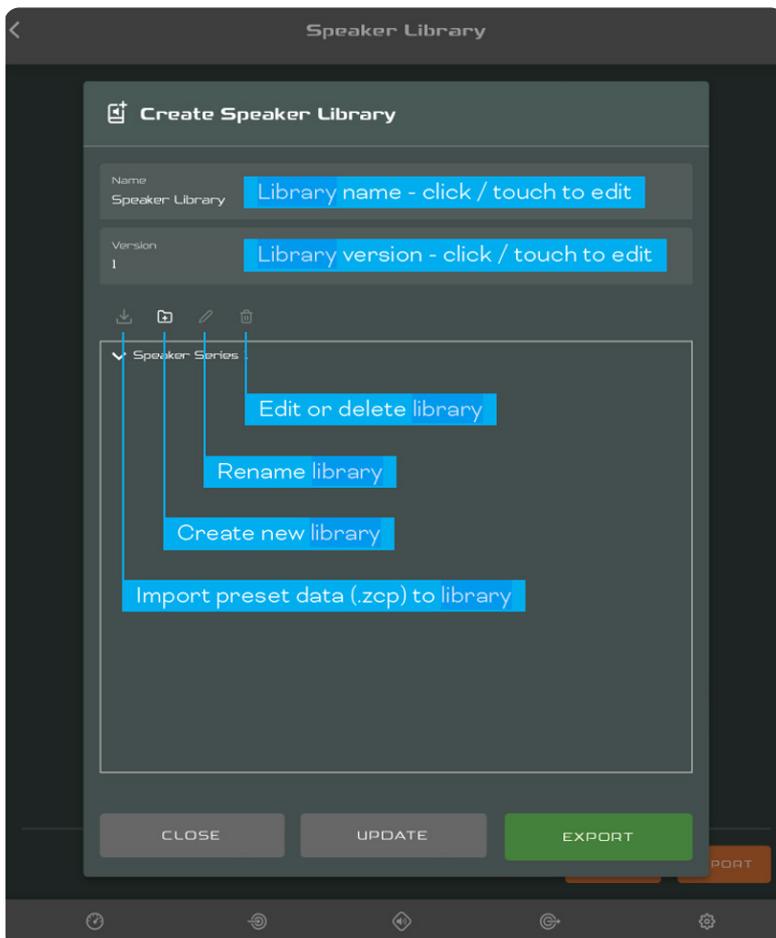



## Attention!

The Speaker Library function allows for exporting and importing entire Speaker Library files, containing many loudspeaker preset files (.zcp). If a complete speaker library file (.zcl) is imported into the Speaker Library – it will overwrite any existing speaker libraries configured on the PHANTOM AMP.

We recommend importing single or multiple speaker preset files (.zcp) only, to avoid any destructive operation to the user-configured library.

## How to import preset files into the Speaker Library.

In the Speaker Library menu press the “CREATE” button, to begin building your new Speaker Library.




CREATE


IMPORT

Name your Speaker Library and version in the top two boxes.

In this example we will call the library “DALI PHANTOM – Version 1.0”

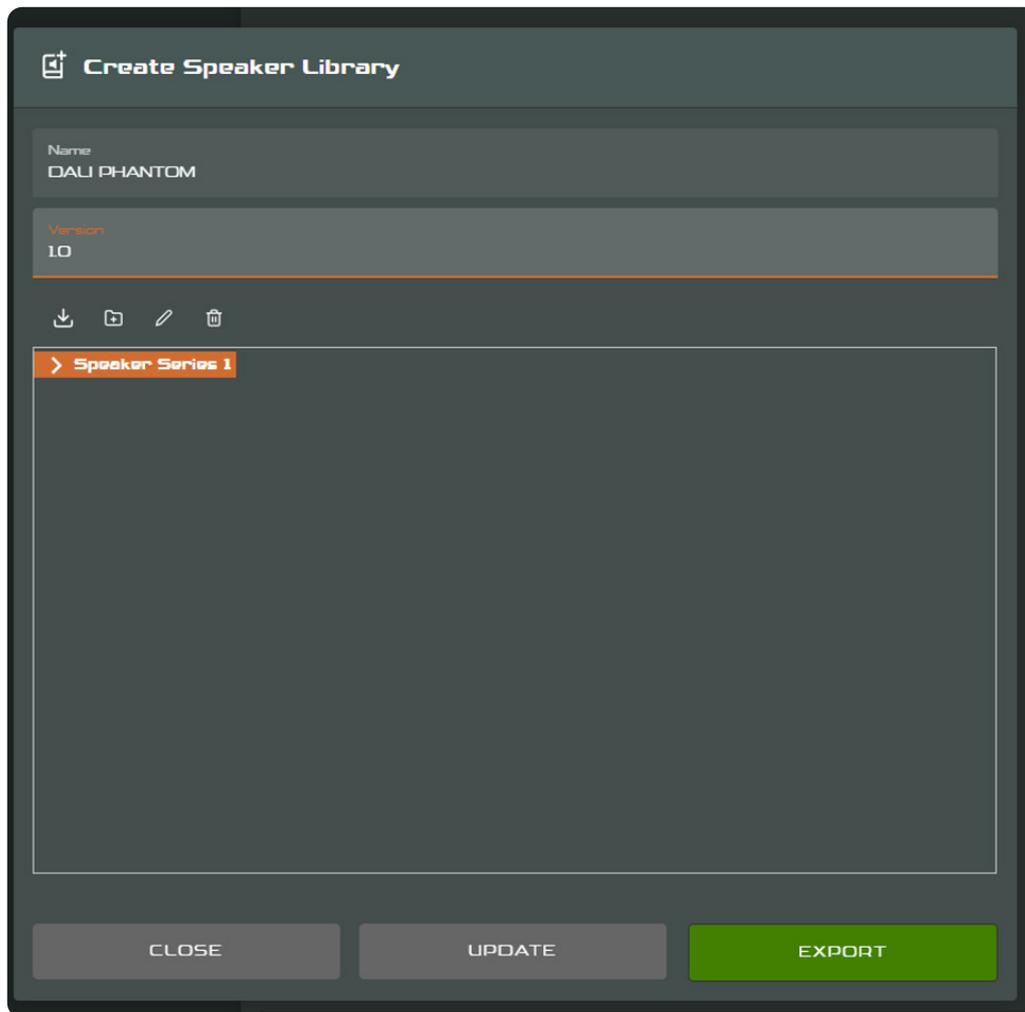


Highlight “Speaker Series 1” and press the pen  button, to rename your speaker series. In this example, we will call it “DALI Preset Package v 1.0”

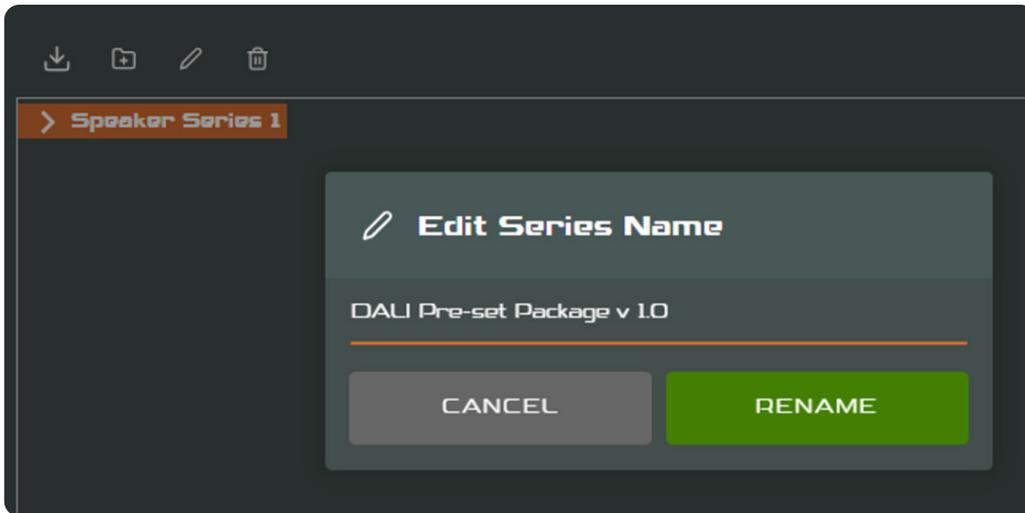

Press “RENAME”


Highlight the “DALI Preset Package v. 1.0” Speaker Series, and press the import  button to import speaker presets into that Speaker Series.

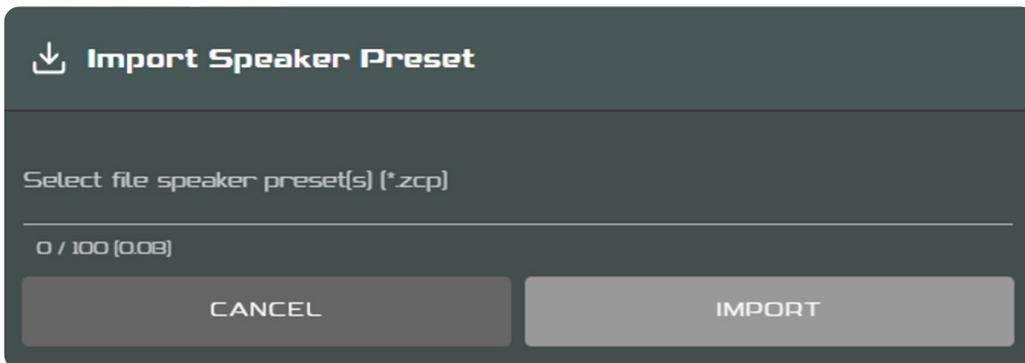

Press “Select file speaker preset(s) (\*.zcp)”

Go to the folder destination where you saved and unzipped the downloaded DALI Preset Package and choose the preset(s) you want to load for the Speaker Series Library.

In this example we will choose all the presets in the un-zipped

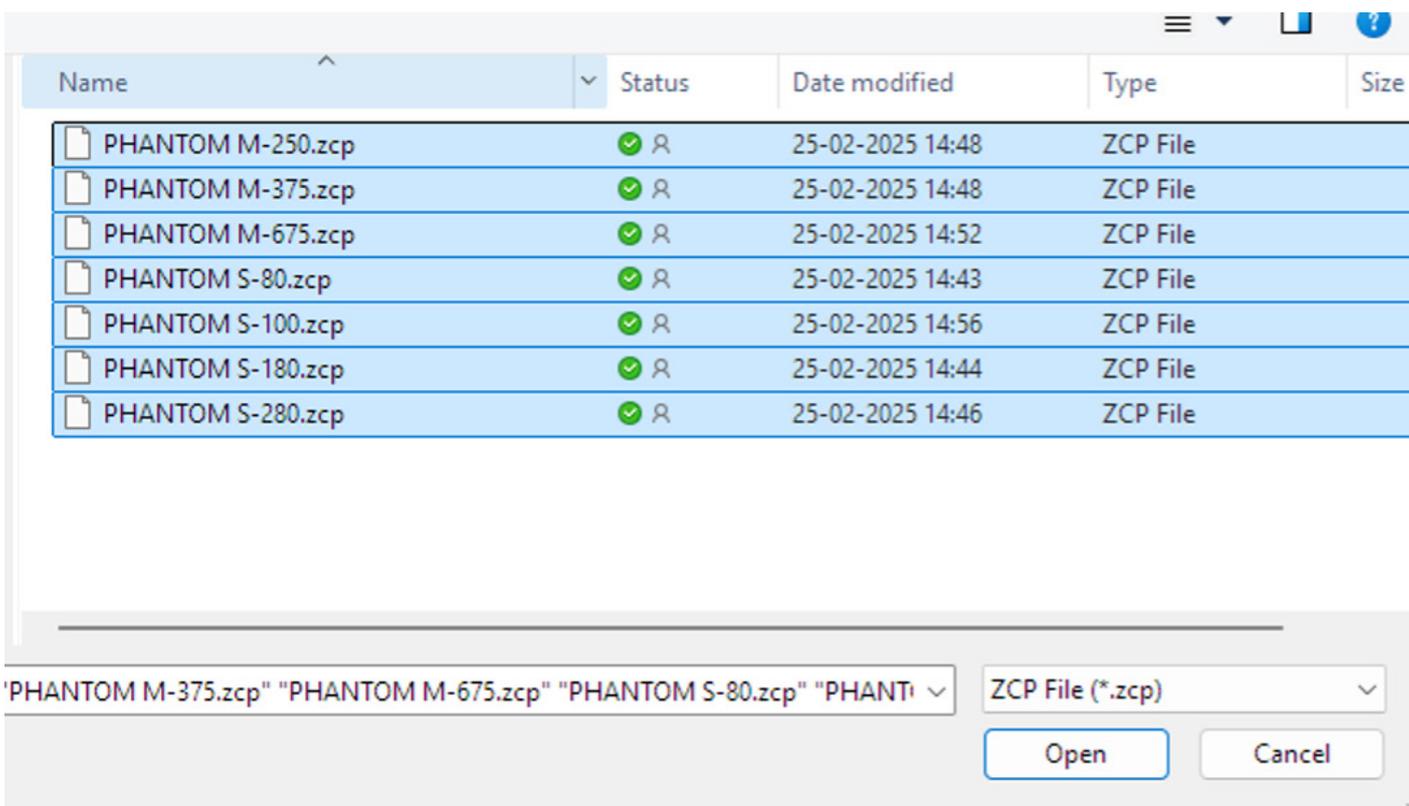


Press “Open” in the finder.



Press “IMPORT”

The seven (7) presets from the DALI Preset Package are now loaded in your Speaker Library.

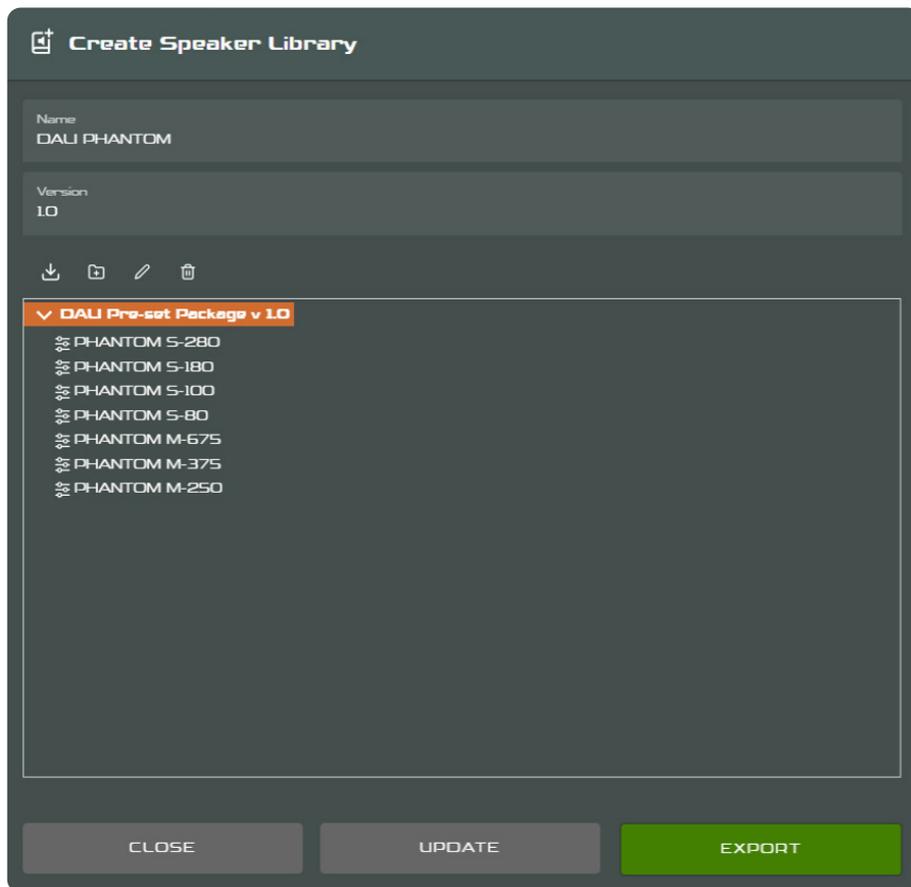

To save your work and the configured Speaker Series, press “UPDATE” and then “CLOSE”



### **Attention!**


If you press “CLOSE” before you press “UPDATE” your work will NOT be saved.

## **Congratulations!**

**You have now created your own Speaker Library, and you can now import these presets (from the Library) to any speaker output channel.**

### 3 How to load a preset from the Speaker Library

A Go to “Outputs” -> “Speaker Presets”

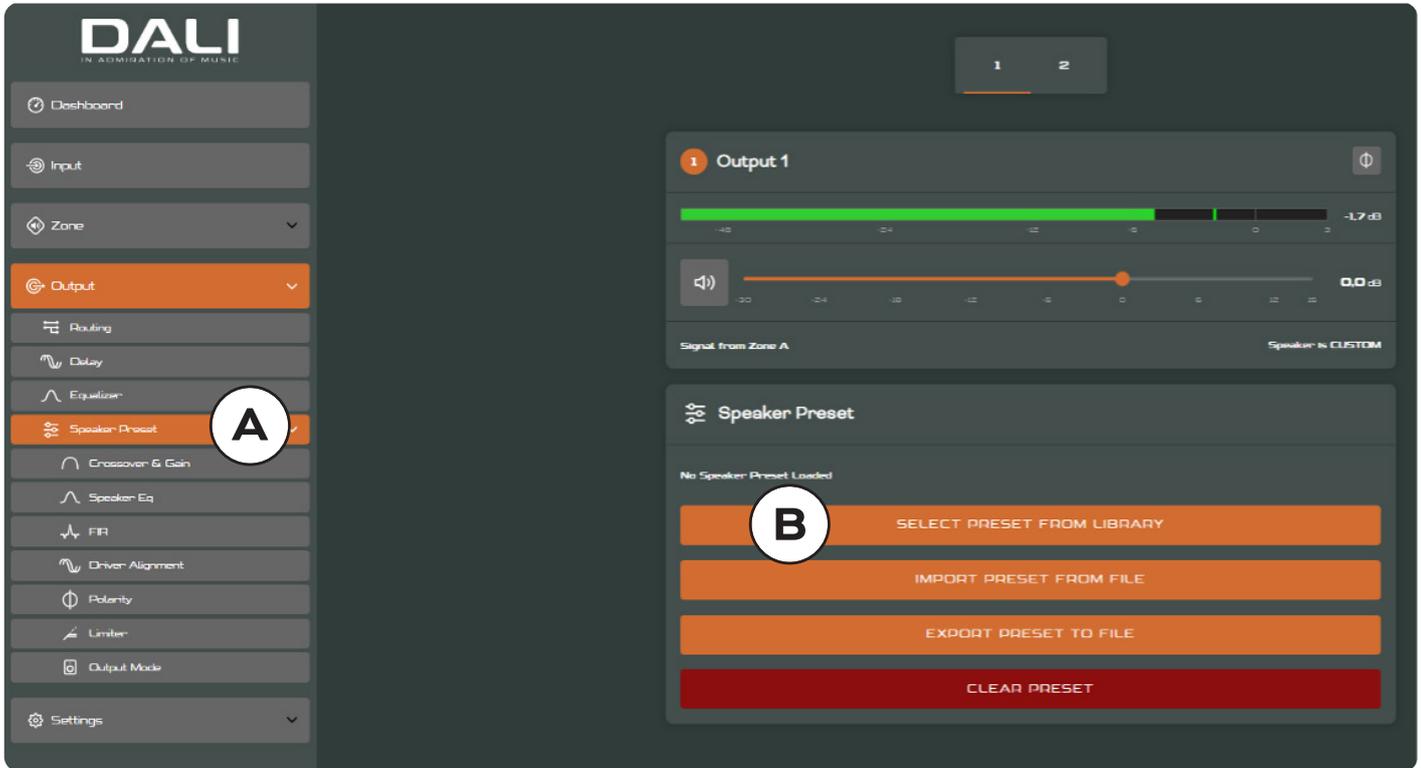

B Press the “SELECT PRESET FROM LIBRARY” button.

Choose the desired preset and press “USE SELECTED”.



The chosen preset is now loaded on the output channel.

